






# RCS52

## OWNER'S MANUAL

Thank you for purchasing the RCS52 Adjustable Universal Lighting Crossbar for Tripod Speaker Stands. Please read these instructions carefully before use. Make sure all parts are included. If any parts are missing please contact our technical help line at 1-646-758-0144, Monday through Friday, 9am to 5pm EST. Also you can check out our informational video on YouTube: <https://youtu.be/wIMpfZiELN0> or search Rockville RCS52.

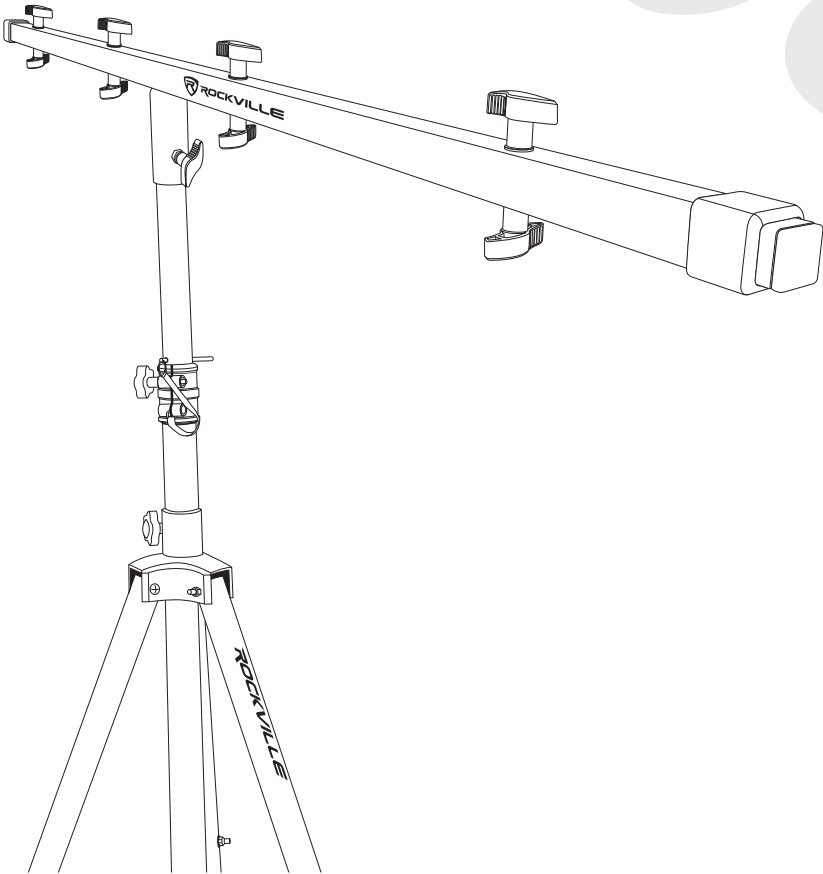


	1 pc.
	2 pcs.

RockvillePro.com

### ASSEMBLING THE CROSSBAR

Begin by mounting the RCS52 crossbar to any lighting stand or speaker tripod with standard 35mm mounting. Simply loosen the mounting lock knob (fig. A) and slide the bar onto the top of the speaker pole (fig. B). Be sure to tighten the lock knob (fig. C) so as to ensure that the bar is securely mounted.

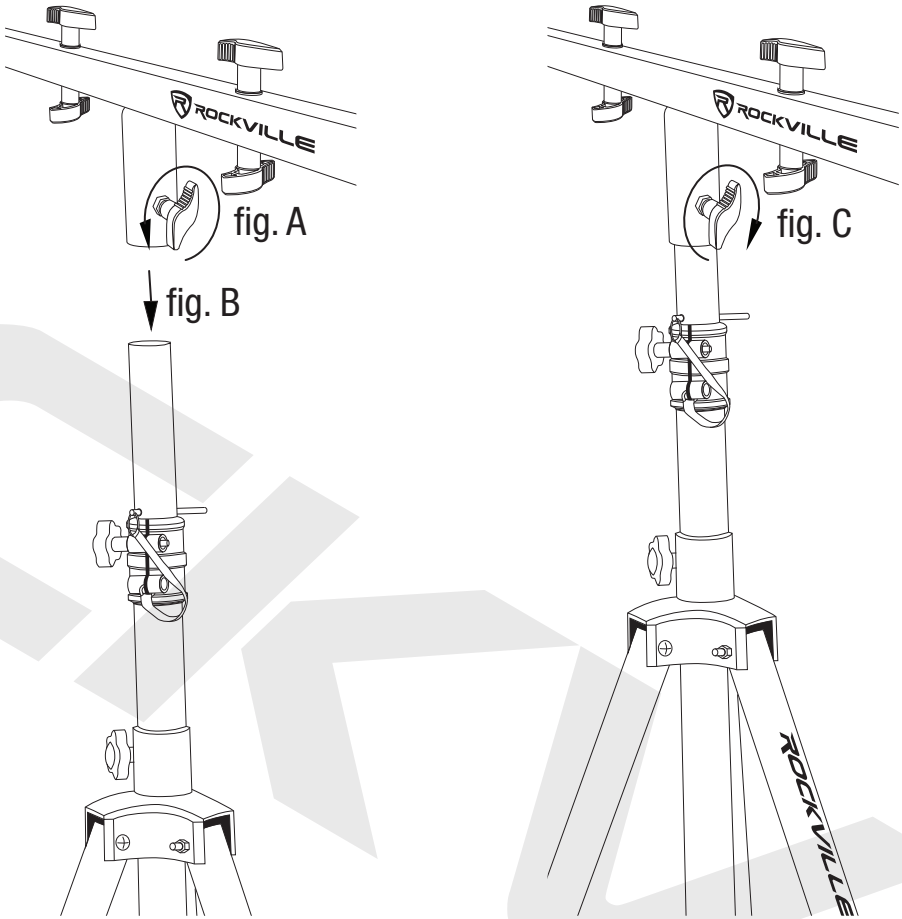

### FEATURES/SPECIFICATIONS

- RCS52 Adjustable Universal Lighting Crossbar Stand
- Adjustable from 5ft to 7.5ft
- Bolts attached to Bar for easy attachments and assembly
- Steel tube telescopic horizontal T-bar can support up to 6 cans
- Can be assembled on lighting stands with standard 35 mm mounting
- Black Finish
- Minimum length: 5 feet (60")
- Maximum length: 7.5 feet (90")
- Unit Weight: 6.2 lbs.
- Shipping Weight: 7.0 lbs.
- Product dimensions: 59" x 5.9" x 1.4"
- Packing dimensions: 60" x 6.7" x 1.8"
- Tube dimensions: 1.2" x 1.2"
- Maximum loading weight: 66 lbs.
- Lower tube: 1.4" (inner radius)

### EXTENDING THE CROSSBAR

The RCS52 can extend from 5 feet to 7.5 feet. To extend the crossbar, loosen and remove the horizontal lock knobs (fig. D). Pull the end of the extension bar until hole 1 of the extension aligns with hole 2 of the exterior bar (fig. E). Insert one set of lock knobs to secure the extension firmly in place (fig. F).

fig. D

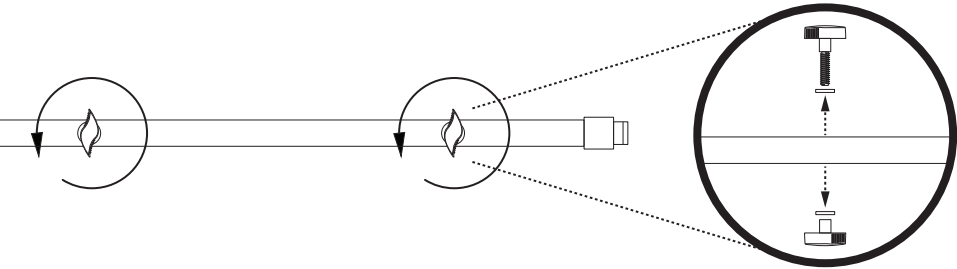


fig. E


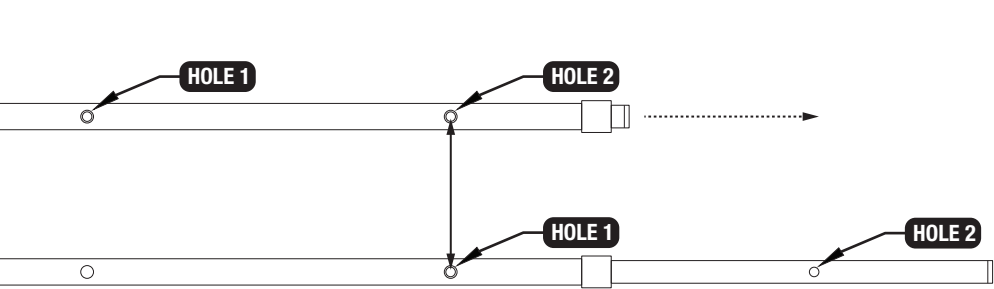


fig. F

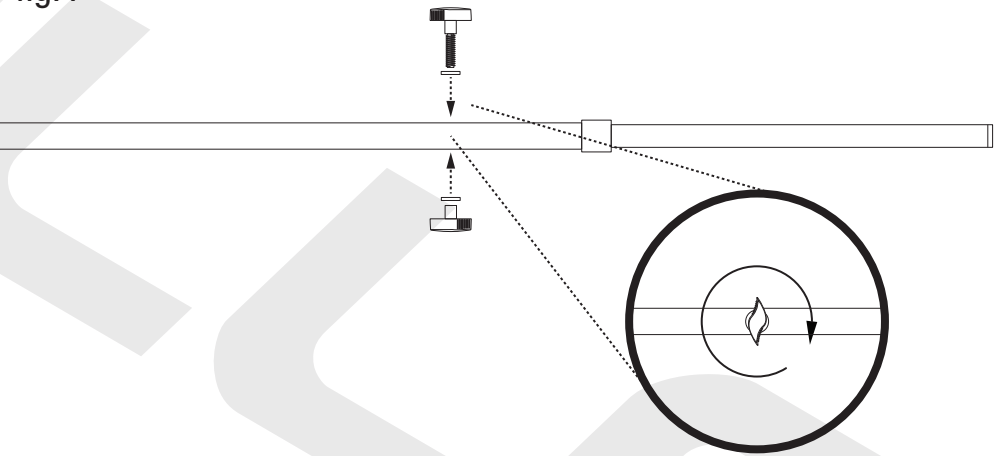

### ATTACHING LIGHTS

The RCS52 has a maximum load weight of 66 lbs and can hold up to six lights. To attach lights simply remove the horizontal lock nuts and mount the lights as prescribed by the manufacturer. To attach more than four lights, use the 2 additional included lock nuts. Be sure to check the load limit on your stand to ensure it can support the weight of the crossbar and the lights.